

Environmental Controls



Inspection Systems



Quantity/Level Sensing



Vehicle and Crash Test



Flight Data Recorder



Rugged, Miniature Position Transducers Solution Guide



- Operating Temperatures from -65° to +125° C
- Environmentally Tested to DO-160D, ED-14D, and MIL-STD-810E
- For Linear, Angular, Rotary, 2D, and 3D Motion
- Analog or Digital Electrical Outputs
- Qualified for Commercial/Military Aircraft and Manned Space Vehicle Use
- Vehicle, Aerospace, Industrial Control, OEM, Medical, and Test & Measurement Applications


"The Flexible Alternative to LVDTs and Linear Potentiometers"

Table Of Contents

Unparalleled Flexibility 2
Technology Overview
How They Are Used
Typical Applications
Product Matrix
Key Innovations
String Potentiometer
and String Encoder
Engineering Guide6
More Information
Additional Resources7
Air Data Products
for Aircraft, Vehicles
and Wind Energy
Company Background 8

Unparalleled Flexibility


These all-environment miniature displacement transducers are also referred to as draw wire transducers, string pots, string encoders, cable extension transducers, and yo yo pots. Complementary to LVDTs, encoders, linear potentiometers, and related displacement sensors, SpaceAge Control position transducers are noted for their small size, rugged performance, accuracy, flexible mounting, and easy installation. Their inherent high-strength flexible cable allows linear, angular, rotary, two-dimensional, and three-dimensional motion to be monitored.

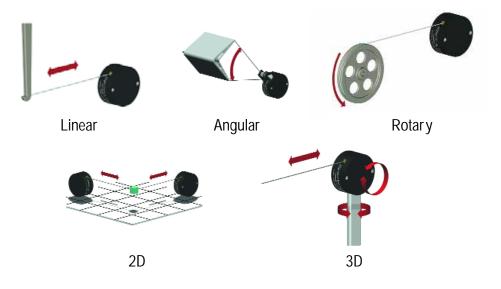

Technology Overview

How Position Transducers Work


Position transducers convert mechanical motion into an electrical signal that may be metered, recorded, or transmitted. SpaceAge Control position transducers consist of a stainless steel displacement cable wound on a threaded drum that is directly coupled to a precision, long-life sensor. Operationally, the position transducer is mounted in a fixed position and the extension cable is attached to a moving object. The axes of movement for the extension cable and moving object are aligned with each other. As movement occurs, the displacement cable extracts and retracts. An internal, engineered spring maintains tension on the displacement cable.

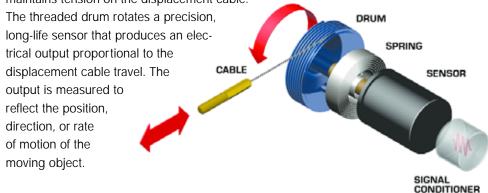

How They Are Used

Position transducers are used in a broad range of position, displacement, and velocity measurement applications to:

- · ensure distance traveled
- continually sense location or relative position
- indicate levels
- act as limit sensors
- control actuators through position sensing
- act as a signal generator for recording position versus time, cycle rate, and magnitude of random cycle events
- monitor relative motion
- indicate events

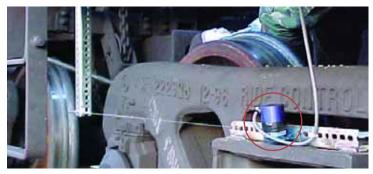

Train Suspension Monitoring



Vehicle Side Impact Testing



Medical Diagnostic Equipment

Typical Applications

Auto/Truck/Bus/ Off-Highway

Suspension

Vehicle Dynamics

Powertrain

NV&H

Ride and Handling

Driver Behavior

Safety Systems

Crash Testing

Motorsports

Driver Controls

Durability

Passenger Comfort

Linkages

Braking Systems

Aircraft

Control Systems

Flight Dynamics

Linkages

Engine

Landing Gear

Braking Systems

Flight Data Recorder

Flight Simulators

Aerospace

Launch Systems

Solar Panel Deployment

Environmental Controls

Docking and Capture

Bellows Level

Experiments

Actuator Position

Rail

Suspension

Material Handling

Vehicle Stability

Earthquake Monitoring

Nautical/Offshore

Controls

Actuators

Engines

Industrial Machinery

Material Handling

Robotics

Packaging

Assembly Equipment

Control Systems

Biomechanics

Man-Machine Interface

Entry and Egress

Prosthetics

Orthotics

Ergonomics

Entertainment and Sports

Bicycles/Motorcycles

Amusement Park Rides

Animation

Sports Equipment

Firearms

Simulators

Virtual Reality

Stage Positioning

Product Matrix

Relative Size	Series	Data Sheet	Electrical Output (In (mm))	Maximum Measurement Range (inches (mm))	Nominal Mass (oz (g))	Outline Dimensions (inches(mm))	Best Operating Temperature Range (°F (°C))	Best Frequency Response (g's)	Best Water/Dust Protection
•	150	www.spaceagecontrol.com/ s021f.htm	analog (voltage divider)	1.5 (38.1)	0.5 (15)	0.75 x 0.75 x 0.38 (19 x 19 x 10)	-85 to +257 (-65 to +125)	49	NEMA 3S / IP54
	170 173 174 175 176	www.spaceagecontrol.com/ s021g.htm www.spaceagecontrol.com/ s021g1.htm	analog (voltage divider)	6.5 (165)	1 (28) (Series 170)	.96 dia. x 0.45 (24 dia. x 11) (Series 170)	-85 to +257 (-65 to +125)	6 to 40	NEMA 3S / IP54
	160 161 162	www.spaceagecontrol.com/ s021h.htm	analog (voltage divider)	42.5 (1080)	4 (113) (Series 160)	1.8 x 2.2 x 2.5 (46 x 56 x 64) (Series 160)	-67 to +257 (-55 to +125)	less than 50	NEMA 4X / IP66
	D60 D61 D62	www.spaceagecontrol.com/ s021i.htm	digital (quadrature)	43.13 (1095)	6 (170) (Series D60)	1.8 x 2.2 x 2.5 (46 x 56 x 64) (Series D60)	-4 to +212 (-20 to +100)	less than 50	NEMA 4X / IP66
	6	www.spaceagecontrol.com/ s021k.htm	voltage divider, bridge, voltage conditioner, 4-20mA, velocity, or digital (quadrature)	85.0 (2159)	6 (170) (Series 60)	1.8 x 2.2 x 3.7 (46 x 56 x 94) (Series 60)	-40 to +185 (-40 to +80)	less than 50	NEMA 4X/ IP66
	161H 162H	www.spaceagecontrol.com/ s021j.htm	analog (voltage divider)	42.5 (1080)	7 (198) (Series 161H)	2.4 x 3.0 x 2.87 62 x 76 x 73 (Series 161H)	-67 to +257 (-55 to +125)	greater than 50	NEMA 4X / IP66
•	180- 0803	www.spaceagecontrol.com/ s021l.htm	analog (voltage divider)	10.0 (254)	2 (57)	1.5 dia. x 1.7 (38 x 43)	-67 to +257 (-55 to +125)	9	NEMA 3S / IP54
Conling Soon	8	www.spaceagecontrol.com/ s021t.htm	voltage divider, bridge, voltage conditioner, 4-20mA, velocity, or digital (quadrature)	2000.0 (50800)	64 (1814)	9.0 x 9.0 x 5.0 (229 x 229 x 127)	-40 to +185 (-40 to +85)	10	NEMA 4 / IP65
	L	www.spaceagecontrol.com/ s021o.htm	analog (voltage divider) or digital (quadrature)	21.25 (540)	3 (85)	1.7 dia. x 1.87 (43 dia. x 47)	-40 to +185 (-40 to +85)	20	NEMA 12 / IP53 (NEMA 4 / IP66 optional)
	М	www.spaceagecontrol.com/ s021u.htm	voltage divider, voltage conditioner, 4-20mA, velocity, or digital (quadrature)	85.0 (2159)	6 (170)	3.91 dia. x 1.78 (99.3 dia. x 45.2)	-4 to +185 (-20 to +85)	10	NEMA 12 / IP53 (NEMA 4 / IP66 optional)

All specifications are subject to change without prior notice.




Key Innovations


SpaceAge Control has pioneered a broad range of techniques and designs to improve displacement sensing ease of use, accuracy, and miniaturization. A few of these innovations are shown below.




Patented (1974) universal mounting base provides 2-axis rotational capability in a compact form factor.




Compact, proven, dualredundant designs provide high-reliability in cylinders and accumulators. Applications include space vehicles, aircraft, and eviromental control systems.




High cable-tension, ultra-lowinertia Model 174-0321T position transducer has the highest frequency response for all subminiature position transducers.



Direct Connect[™] sensor-todrum technology eliminates the use of backlash-causing torsion springs, clutches, gears, and other devices.




AccuTrak[™] threaded drums are offered only by SpaceAge Control and enhance repeatability performance by not allowing cable overlap nor cable spread.



Ultra-small designs fit where other technologies are too large. Series 150 products are the world's smallest.




Coming soon: the Series 8 long-range position transducer offers an environmentally-protected displacement cable exit, enhanced repeatability, and increased lifecycle capability.



RoundAbout[™] cable guide

allows cable extraction direction to change "on the fly" without re-orienting the position transducer.

String Potentiometer and String Encoder Engineering Guide



Would you like to qualify for a 12-page, full-color copy of the "String Potentiometer and String **Encoder Engineering Guide"?**

If so, complete a web form at www.spaceagecontrol.com/req054b.htm and you will be qualified for a FREE downloadable (electronic) copy. This publication will get you up and running on cable-actuated displacement-sensing technology, uses, designs, benefits, and limitations.

More Information

For complete information including data sheets, fully-dimensioned installation drawings, and CAD solid models, visit www.spaceagecontrol.com/ptmain.htm. Or, contact us by phone (661-273-3000), fax (661-273-4240), or e-mail (email@spaceagecontrol.com).




Additional Resources

For more information on displacement measurement and sensors, review these publications:

	<u>Publication</u>	www.spaceagecontrol.com/
•	Selecting Position Transducers	selpt.htm
•	Sensor Total Cost of Ownership	s054a.htm
•	Application Note for Aircraft/Aerospace	s004a.pdf
•	Application Note for Ground Vehicles/Transportation	s005a.pdf
•	Application Note for Industrial Control/OEM Uses	s054f.htm
•	Thermal Effect Calculator	calctemp.htm
•	Catenary Curve (Cable Sag) Calculator	calccabl.htm
•	Sinusoidal Motion Calculator	calcsinm.htm
•	Linearity Calculator	calclin.htm
•	Cable Stretch Calculator	calcstre.htm
•	Cost of Ownership Calculator	calctco.htm
•	Zero-Span Calculator	calczs.htm
•	Voltage Divider and Power Calculator	calcvd.htm
•	Installation Guide	s023a.pdf
•	Position Measurement & Control Newsletter	reqsub.htm
•	Evaluation Position Transducer Request Form	reqevalpt.htm

Air Data Products for Aircraft, Vehicles, and Wind Energy

Need flight-proven, reliable air data products for aerospace, ground vehicle, marine, and wind energy applications? We also produce pitot-static tubes, flow angle vanes, trailing cones and related air data measurement devices for a broad range of applications including UAVs, race cars, military fighters, and rotary wing aircraft. For more information, visit www.spaceagecontrol.com/adpmain.htm.

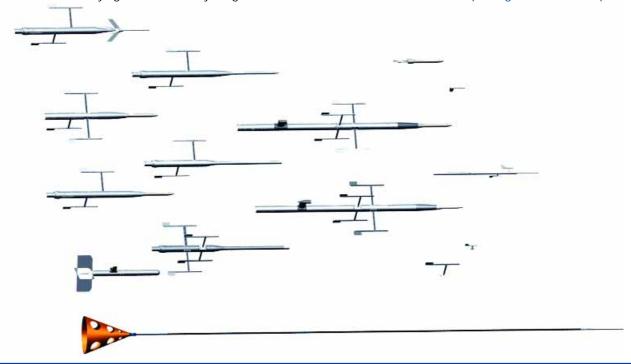

Company Background


Leading The Way In Position Measurement

SpaceAge Control was established in 1968 to design, develop, and manufacture pilot protection devices in support of space-based and high-performance test aircraft programs. In 1970, the company was awarded a NASA contract to produce precision, small-format position transducers for aircraft flight control testing. The successful completion of this contract led to the development and production of a complete line of innovative, small-size position transducers.

Since the 1970's, virtually all U.S., Canadian, and European aerospace companies use SpaceAge Control's position transducers in their research, development, and test activities. Often, these products are designed and manufactured to custom specifications. As a result of these efforts, SpaceAge Control's quality system met the Mil-Q-9858A quality system requirement. Today, the SpaceAge Control quality system meets the ISO 9001 and AS9000 quality standards.

In 1989, a single auto racing team began using these position transducers to monitor throttle movement and suspension travel. This use resulted in the adoption of the products in a broad range of vehicle test and measurement projects including anthropomorphic dummy instrumentation, impact testing, and control verification. SpaceAge Control has also leveraged its electro-mechanical core technologies to air data products and automotive electrical test equipment.

Today, SpaceAge Control products benefit customers in over 20 industries and in over 40 countries. The seven largest auto manufacturing companies and seven largest aerospace companies use SpaceAge Control products. The products are used on diverse applications such as off-road heavy equipment, manned space vehicles, and Formula 1/Indy/NASCAR race cars. Environmentally tested to commercial aircraft and military standards, SpaceAge Control position transducers and air data products are the products of choice for demanding applications.



Early position transducer use: YF-12 aircraft dynamic testing in 1970.



Initial designs set the standard for small size, ruggedness, and accuracy.

Air Data and Displacement Sensors for a Demanding World

Represented by:



SpaceAge Control, Inc. 661-273-3000 661-273-4240 (fax) www.spaceagecontrol.com email@spaceagecontrol.com 38850 20th Street East Palmdale, CA 93550 USA

S021A(Q)